


MARK VIEW



'X' Bakışı
View 'X'

---▽--- Taşlanmış Yüzey (Grinding surface)
- - - - - Sırsız Yüzey (Unglazed Surface)

ELEKTRİKSEL PERFORMANS

ELECTRICAL PERFORMANCE (IEC 60137-2015)

En Yüksek Çalışma Gerilimi (Nominal Highest System Voltage)(Um)	36 kV
Anma Akımı (Rated Current)	250 A
Şebeke Frekanslı Dayanım Gerilimi (Power Frequency Withstand Voltage)	Kuru (Dry) 77 kV
	Yaş (Wet) 70 kV
Yıldırım Darbe Dayanım Gerilimi (Lightning Impulse Withstand Voltage)	170 kV

MEKANİKSEL PERFORMANS


MECHANICAL PERFORMANCE (IEC 60137-2015)

Konsol Çalışma Yüğü (Cantilever Operating Load)	500 N
--	-------

DIELEKTRİK PARÇALAR

(DIELECTRIC PARTS)

Malzeme (Material) IEC 60672-3	Porselen (Porcelain)
Kaçak Mesafesi (Creepage Distance)	(Z-Z) min. 900mm
Sır Rengi (Glaze Color)	Kahverengi (Brown)
Tolerans (General Tolerance)	DIN 40680
Ağırlık (Weight)	~11 kg

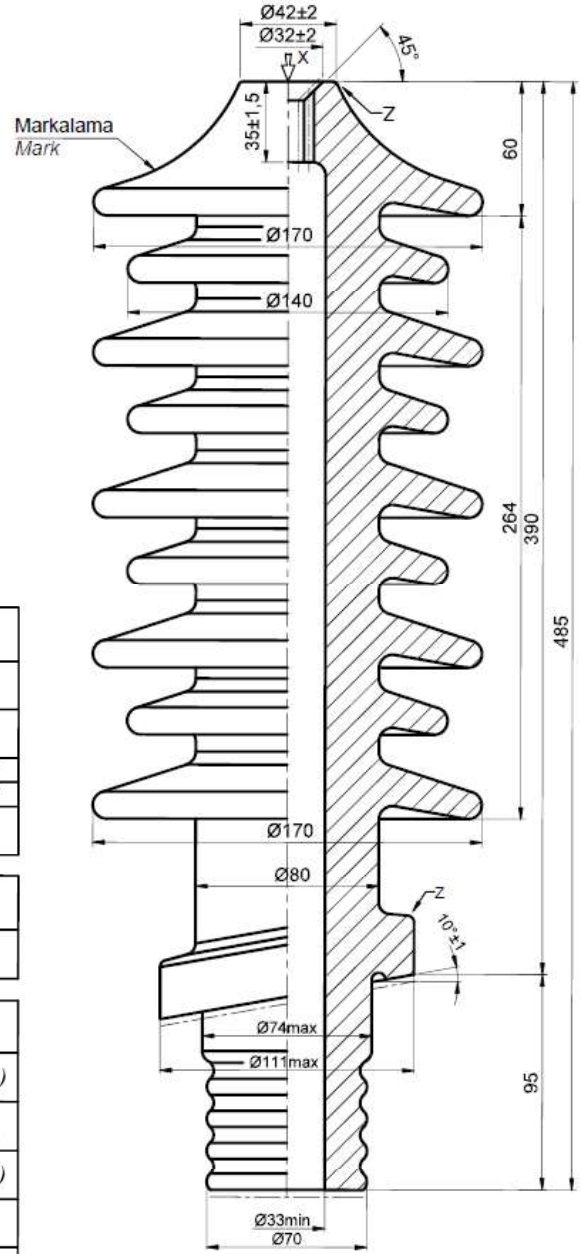

03

02

01

00

Rev

Date

Drw

Chk

App

Original

Description

General Tolerance : DIN 40680

All dimension in millimetres unless otherwise stated

IF IN DOUBT - PLEASE ASK !

MP
metsonpower

Title

HV BSH 30NF/250A (CD:900mm) DIN 42531

Description

GA DWG BSH 30NF250A - Eşik

Scale



Drawing No.

Sheet No.

Total Sheet

Size

1

1

A4

4

3

2

1